

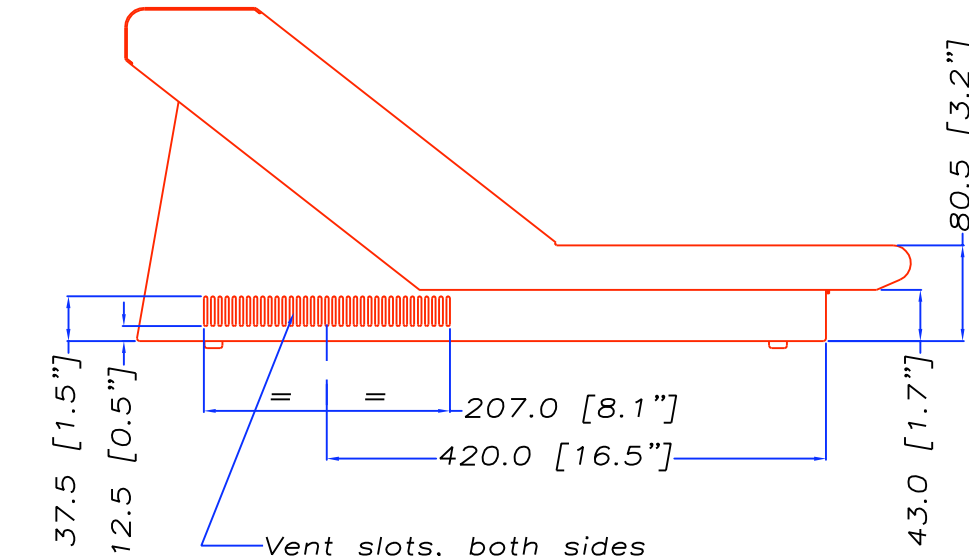


NOTE:
A indicates position of
15mm(0.6")dia. x 6mm(0.25")high foot under base.


Vent slots on base

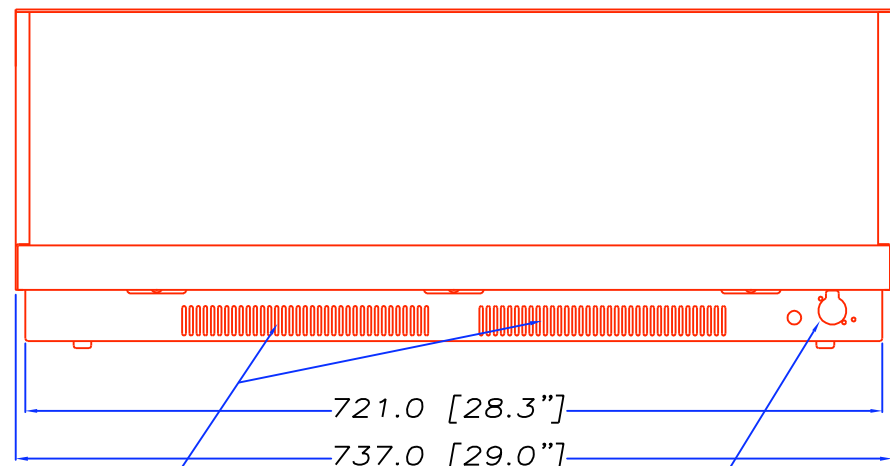

Vent slots, both sides

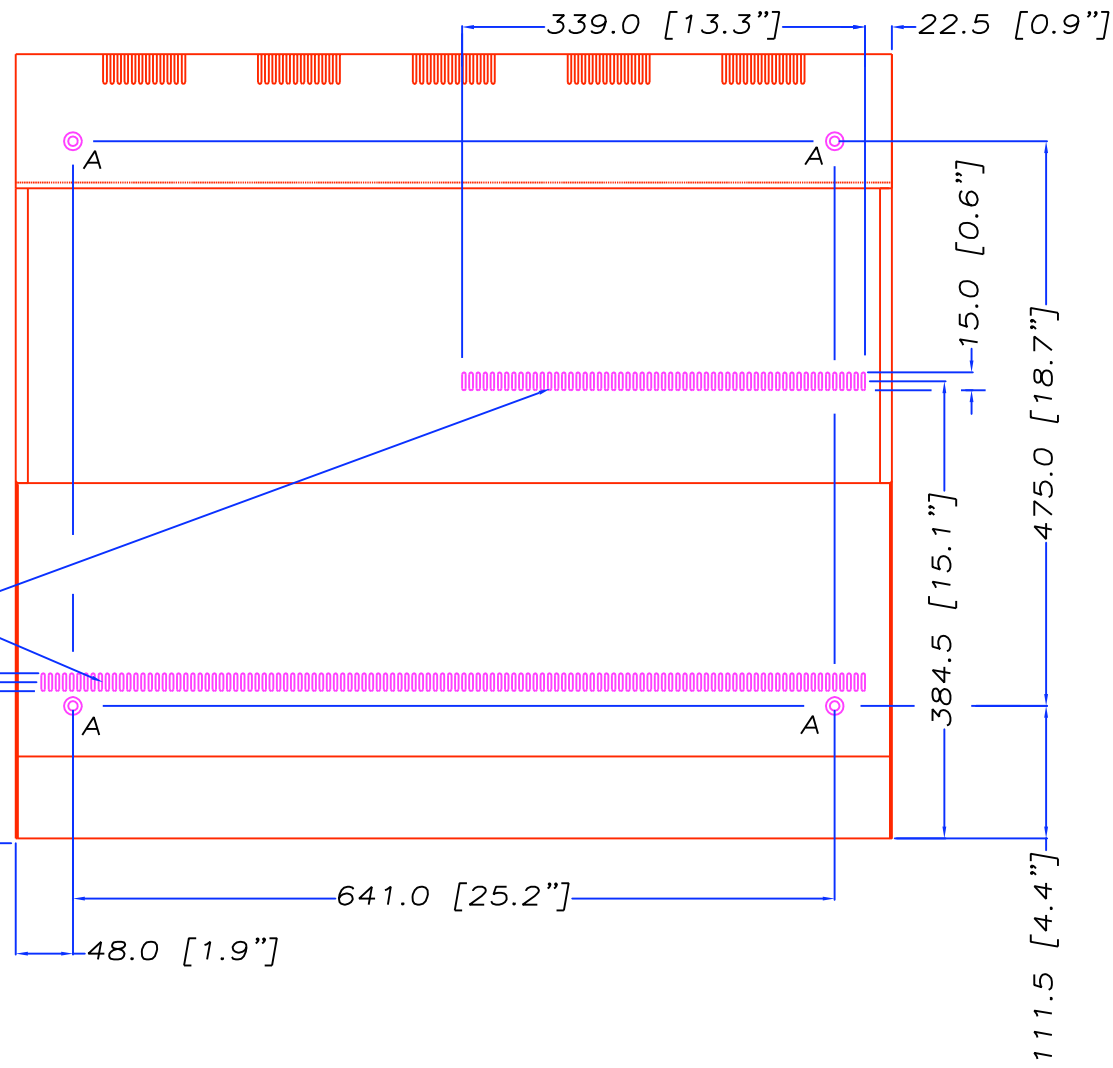

Vent slots in front face

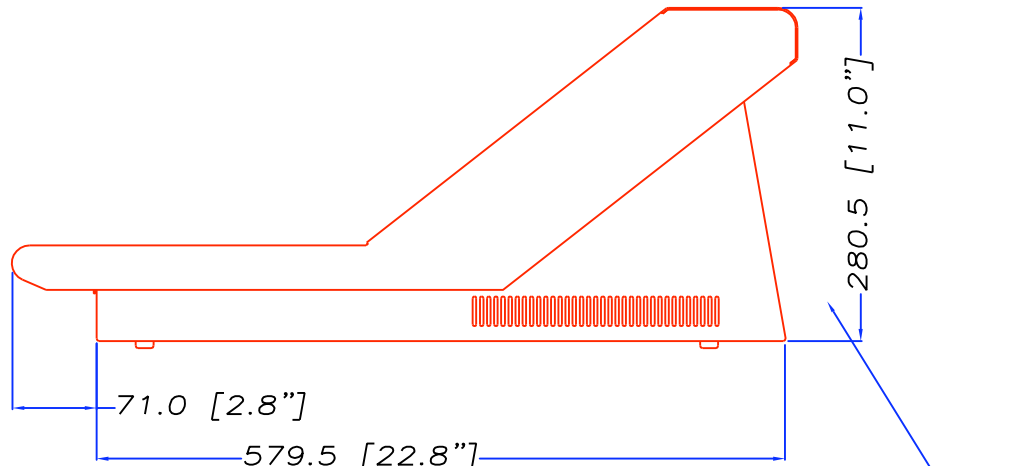

Access required for Jack/XLR connectors

Allow min. 75mm(3")clearance at rear for connectors

Issue	Alteration	Date	Initials	Chkd.	Appd.	ECN No.

The drawing and the design shown are the exclusive property of audient plc. The drawing shall not be copied nor its contents communicated or reproduced in any form and for any purpose without the prior specific authority in writing of audient plc.

audient

Scale: N.T.S.	audient audient plc, tile barn, harnard hamshire RG25 2PE UK ph: +44 (0)1256 381 944 fx: +44 (0)1256 381 906 e-mail: audient@compuserve.com
Drawn: Industrial Arts	
Checked:	
Approved:	Dwg No.
Date: 09/09/09	
Projection: -	Issue
	Title: ZEN INSTALLATION DETAILS
	B